


Introducing 0.85 mm




Supreme design for **ULTIMATE** Crossability and Deliverability

The Most Competitive **Crossing** and **Tip Entry** Profile

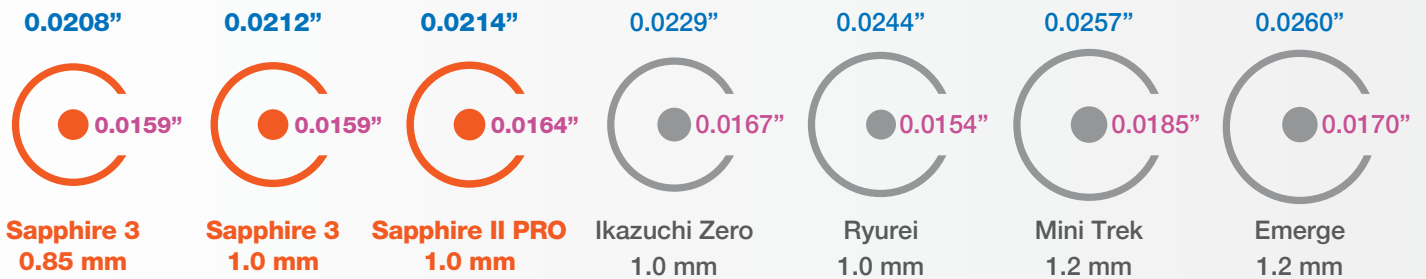

* Data on file

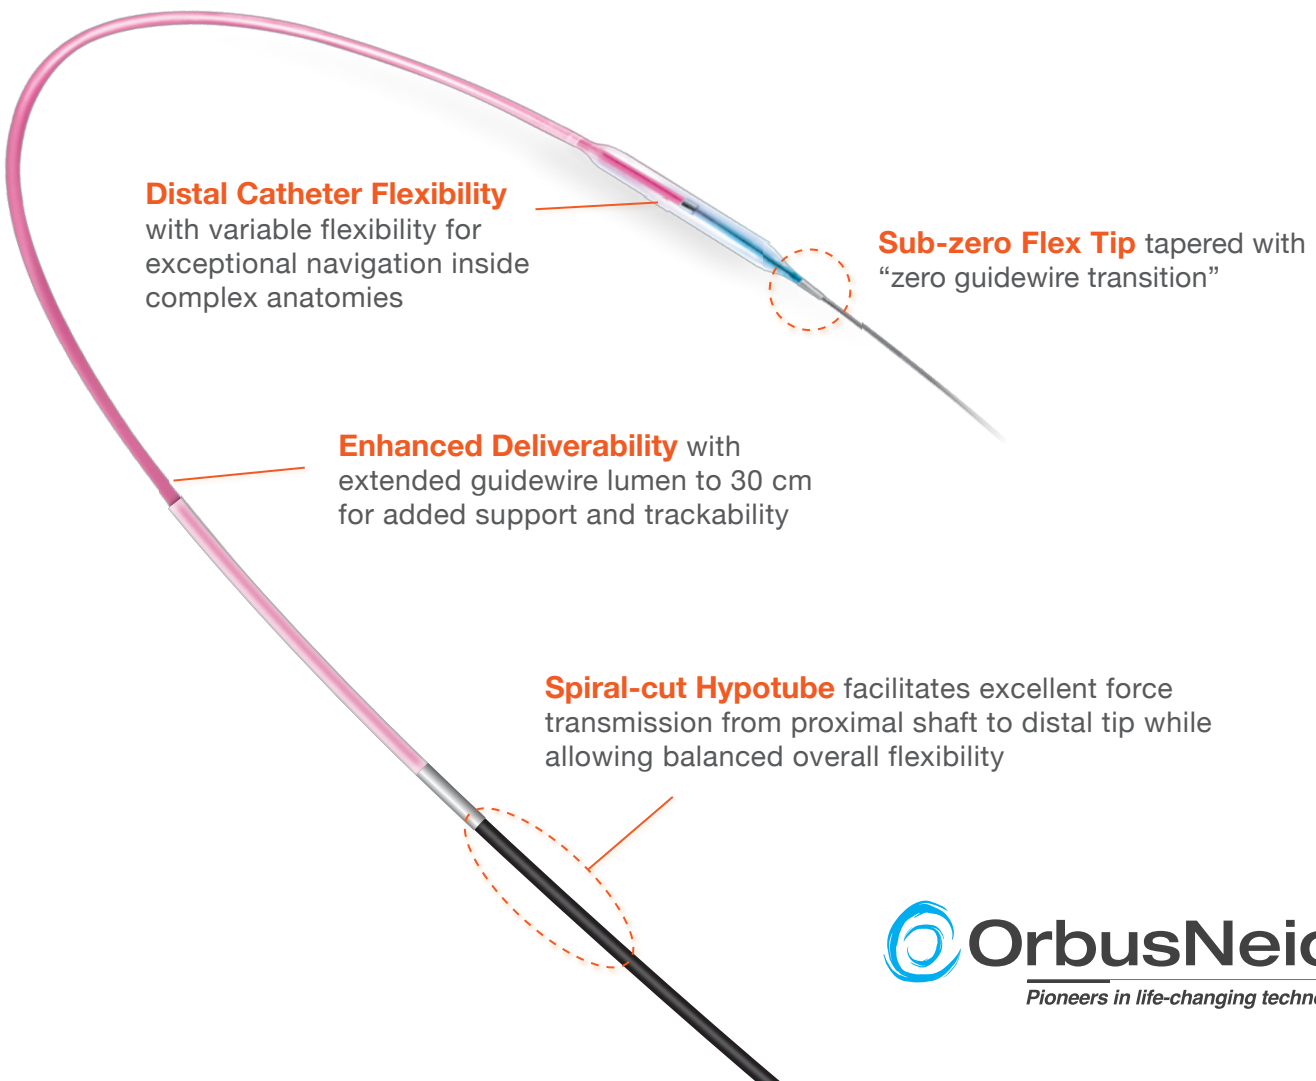

Ordering Information

EU Manufacturing Catalogue Numbers

Balloon Diameter (mm)	Balloon Working Length (mm)			
	5	8	10	15
0.85	208-053-6	-	208-103-6	-
1.0	210-053-6	210-083-6	210-103-6	210-153-6
1.25	212-053-6	212-083-6	212-103-6	212-153-6




Compliance Chart

Pressure (atm)	Balloon Diameter (mm)		
	0.85	1.0	1.25
2	0.78	0.94	1.18
4	0.82	0.97	1.22
6 (NOM)	0.85	1.00	1.25
8	0.88	1.03	1.28
10	0.92	1.06	1.32
12	0.95	1.09	1.35
14	0.98	1.12	1.38
16 (RBP)	1.01	1.15	1.42
18	1.05	1.18	1.45
20	1.08	1.21	1.48

Technical Specifications

Proximal Shaft	1.9F
Distal Shaft	2.36F
Catheter Working Length	145 cm
Tip Length	1.5 mm
Marker Band(s)	Single
Guidewire Tracking Lumen	30 cm
Coating	<ul style="list-style-type: none"> • Hyrdophilic (tip to guidewire exit port) • Hydrophobic (guidewire lumen)
Nominal Pressure (NOM)	6atm
Rated Burst Pressure (RBP)	16atm
Balloon Material	Nylon
Balloon Folds	2
Balloon Diameters (mm)	Ø0.85, 1.0, 1.25
Balloon Lengths (mm)	5, 8, 10, 15

0.85 - 1.25 mm

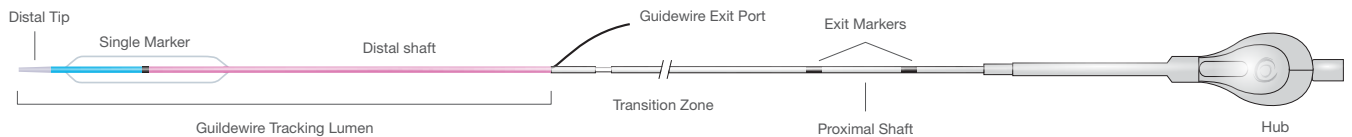

For more information please visit our website at www.OrbusNeich.com or contact us:

CORPORATE HEADQUARTERS

3/F, Building 20E
 Hong Kong Science Park
 Shatin, N.T., Hong Kong
 Phone +852.2802.2288
 Fax +852.2507.3532

EMEA HEADQUARTERS

Drs. W. van Royenstraat 5
 3871 AN Hoevelaken
 The Netherlands
 Phone +31.33.254.1150 Toll Free Phone 00800.0254.1150*

* Only for Belgium, Denmark, France, Germany, Ireland, Netherlands, Norway, Sweden and UK

©2020 ORBUSNEICH Medical Corporation or its affiliates. All rights reserved.

Not available for sale in the USA.

G-70-1067 Rev03

SAPPHIRE and ORBUSNEICH are registered Trademarks of OrbusNeich Medical Corporation.
 All data and photos on file. Illustrations are not to be considered as engineering drawings or photos.

 **OrbusNeich®**
 Pioneers in life-changing technologies

Ordering Information

EU Manufacturing Catalogue Numbers


Balloon Diameter (mm)	Balloon Working Length (mm)				
	10	12	15	20	30
1.5	215-103-6	215-123-6	215-153-6	215-203-6	-
1.75	217-103-6	-	217-153-6	217-203-6	-
2.0	220-103-6	220-123-6	220-153-6	220-203-6	-
2.25	222-103-6	-	222-153-6	222-203-6	-
2.5	225-103-6	225-123-6	225-153-6	225-203-6	225-303-6
2.75	227-103-6	-	227-153-6	227-203-6	-
3.0	230-103-6	230-123-6	230-153-6	230-203-6	230-303-6
3.25	232-103-6	-	232-153-6	232-203-6	-
3.5	235-103-6	-	235-153-6	235-203-6	235-303-6
4.0	240-103-6	-	240-153-6	240-203-6	-



Compliance Chart

Pressure (atm)	Balloon Diameter (mm)									
	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.5	4.00
2	1.42	1.66	1.87	2.11	2.36	2.59	2.82	3.06	3.29	3.77
4	1.46	1.70	1.94	2.18	2.43	2.67	2.91	3.16	3.39	3.89
6 (NOM)	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	4.00
8	1.54	1.80	2.06	2.32	2.57	2.83	3.09	3.34	3.61	4.11
10	1.58	1.84	2.13	2.39	2.64	2.91	3.18	3.44	3.71	4.23
12	1.62	1.89	2.19	2.45	2.71	2.98	3.27	3.53	3.82	4.34
14 (RBP)	1.66	1.94	2.25	2.52	2.78	3.06	3.36	3.62	3.92	4.45
16 (RBP)	1.70	1.98	2.32	2.59	2.85	3.14	3.45	3.72	4.03	4.57
18	1.74	2.03	2.38	2.66	2.92	3.22	3.54	3.81	4.14	4.68
20	1.78	-	-	-	-	-	-	-	-	-

* Nominal Pressure. The nominal in vitro device specifications do not take into account any lesion resistance.
** Rated Burst Pressure. Do not exceed RBP

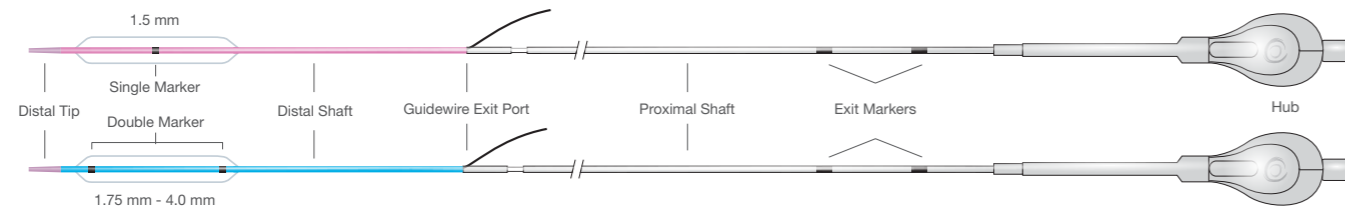

For more information please visit our website at www.OrbusNeich.com or contact us:

CORPORATE HEADQUARTERS

3/F, Building 20E
Hong Kong Science Park
Shatin, N.T., Hong Kong
Phone +852.2802.2288
Fax +852.2507.3532

EMEA HEADQUARTERS

Drs. W. van Royenstraat 5
3871 AN Hoevelaken
The Netherlands
Phone +31.33.254.1150 Toll Free Phone 00800.0254.1150*

* Only for Belgium, Denmark, France, Germany, Ireland, Netherlands, Norway, Sweden and UK

©2020 ORBUSNEICH Medical Corporation or its affiliates. All rights reserved.

Not available for sale in the USA.

G-70-1066 Rev03

SAPPHIRE and ORBUSNEICH are registered Trademarks of OrbusNeich Medical Corporation.
All data and photos on file. Illustrations are not to be considered as engineering drawings or photos.




*Supreme design for
Crossability and Deliverability*




Sapphire 3 is the ultimate workhorse balloon designed with balanced handling for supreme **Crossability** and **Deliverability**

The Most Competitive **Crossing** and **Tip Entry Profile*** (Ø 3.0 mm)

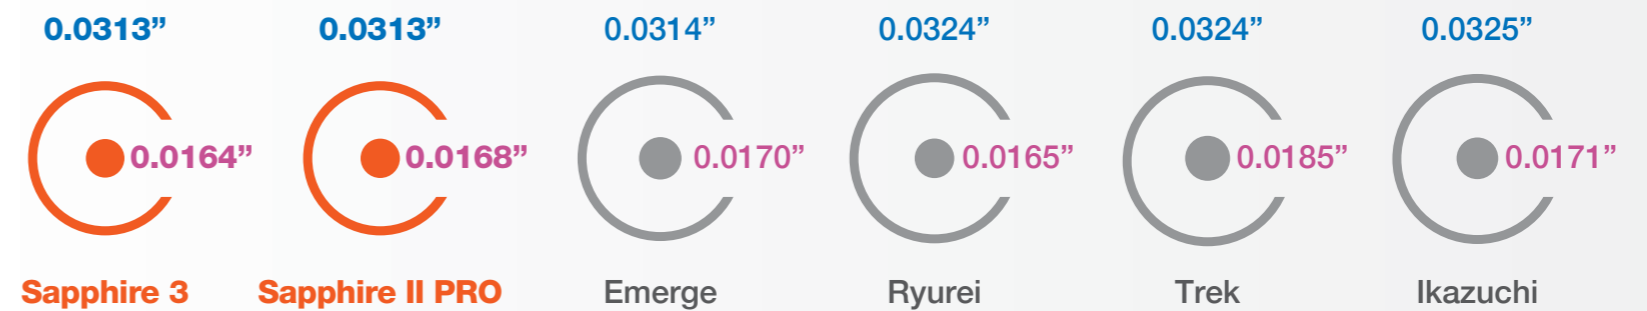

* Data on file

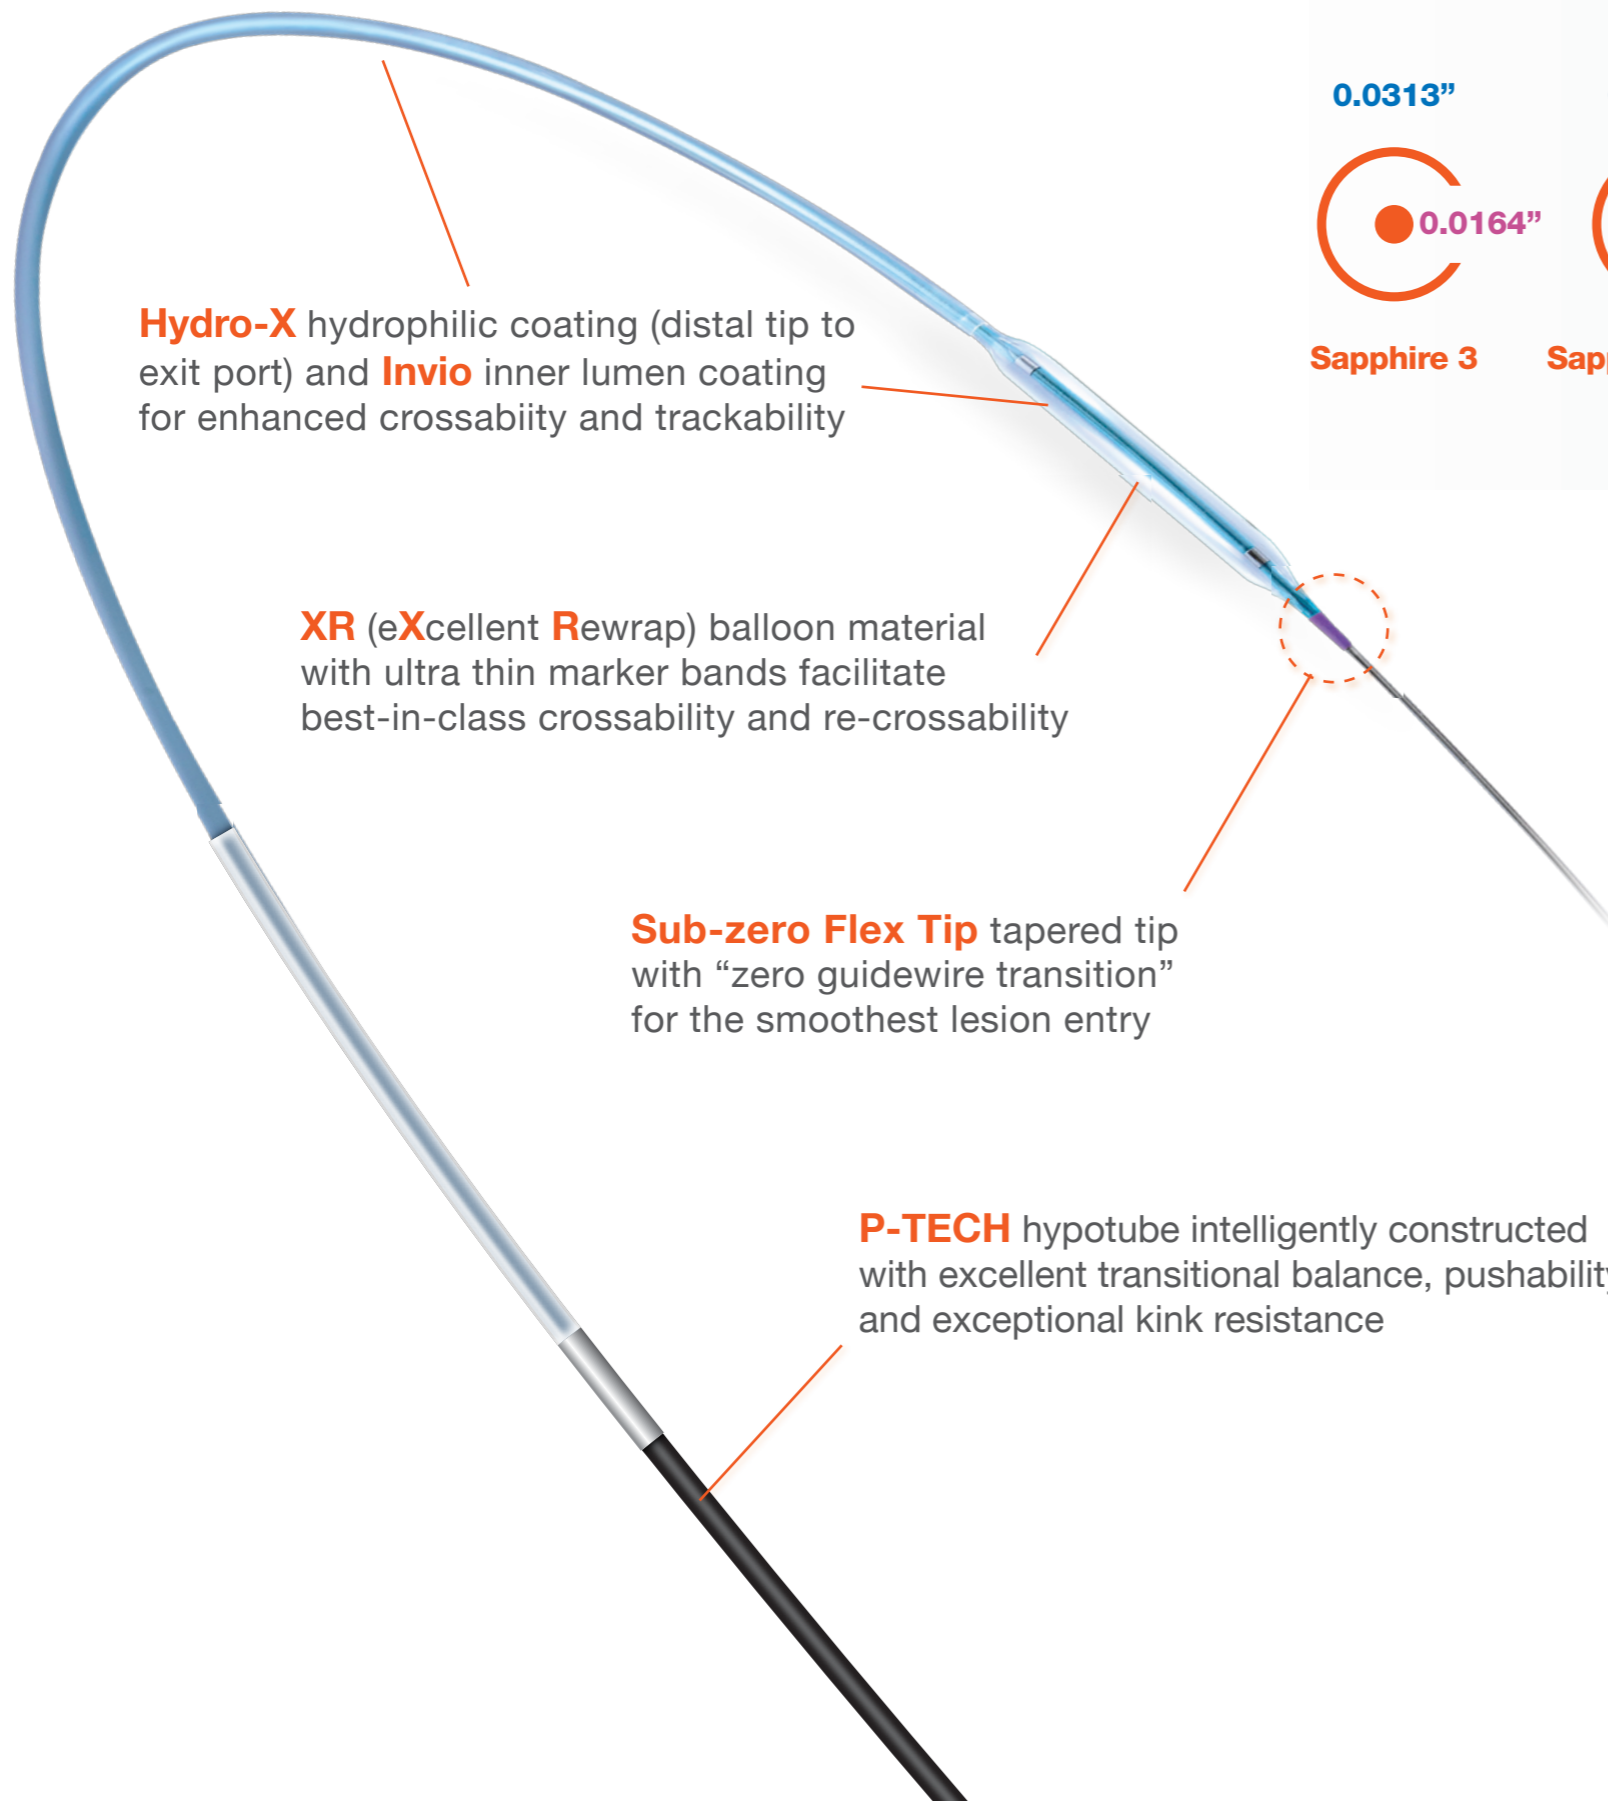

Hydro-X hydrophilic coating (distal tip to exit port) and **Invio** inner lumen coating for enhanced crossability and trackability

XR (eXcellent **R**ewrap) balloon material with ultra thin marker bands facilitate best-in-class crossability and re-crossability

Sub-zero Flex Tip tapered tip with “zero guidewire transition” for the smoothest lesion entry

P-TECH hypotube intelligently constructed with excellent transitional balance, pushability and exceptional kink resistance

Crossing is Everything

Technical Specifications

Proximal Shaft	1.9F (Ø1.5); 2.1F (Ø1.75-4.0)
Distal Shaft	2.36 - 2.7F (Ø1.5-4.0)
Catheter Working Length	140 cm
Tip Length	1.5 - 2.5 mm (Ø1.5-4.0)
Marker Band(s)	1 (Ø1.5); 2 (Ø1.75-4.0)
Guidewire Tracking Lumen	25 cm
Coating	<ul style="list-style-type: none"> Hydrophilic (tip to guidewire exit port) Hydrophobic (guidewire lumen)
Nominal Pressure (NOM)	6atm
Rated Burst Pressure (RBP)	16atm (Ø1.5); 14atm (Ø1.75-4.0)
Balloon Material	Nylon (Ø1.5); Pebax (Ø1.75-4.0)
Balloon Folds	3
Balloon Diameters (mm)	Ø1.5, 1.75, 2.0, 2.25, 2.5, 2.75, 3.0, 3.25, 3.5, 4.0
Balloon Lengths (mm)	10, 12, 15, 20, 30